



CLIPPER 34


Skipper a Clipper



SPECIFICATIONS

LENGTH OVERALL	10.21 METRES....	33'6"
BEAM	3.58 METRES....	11'9"
DRAUGHT96 METRES....	3'2"
FRESH WATER CAPACITY	590 LITRES.....	130 GALS
FUEL CAPACITY	450 LITRES.....	100 GALS
DISPLACEMENT	6.4 TONNES....	13,000 LBS
BERTHS		8-10
ENGINE — FORD DIESEL 120 HP		
OPTIONAL, TWIN — 80 HP		
SPEED		8-11 KNOTS

Sun Bird 25

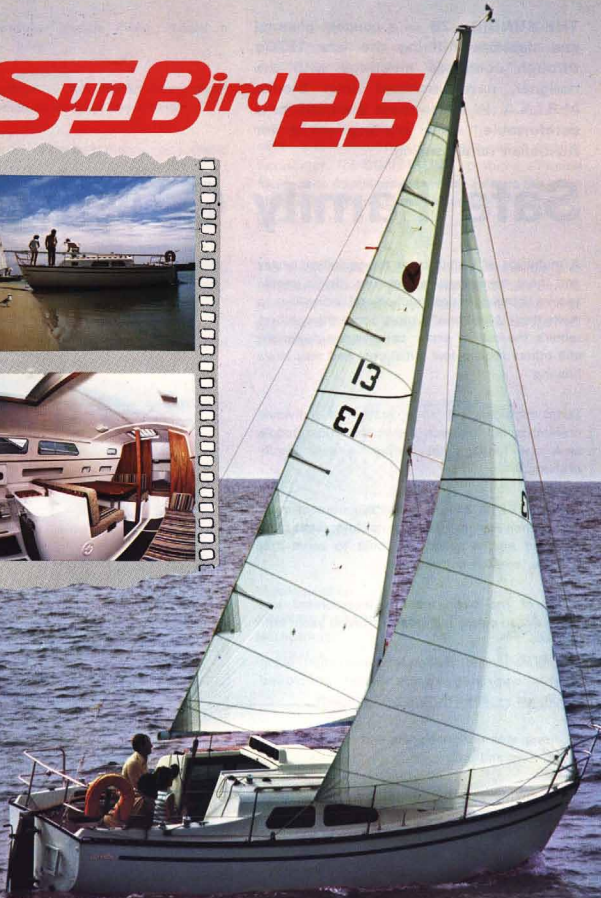

Prices and specifications subject
to change without notice.

Sun Bird 25

Designer
Australian Manufacturer

J. B. Brooke MRINA (N.Z.)
Bolwell Fibreglass Pty. Ltd.

SPECIFICATIONS:

Length 7.5 m (25')
Beam 2450 mm (8'2")
Draft 500 mm - 1200 mm (1'8" - 4')
Displacement 1600 kgs (3500 lb.)
Ballast 545 kgs. (1200 lb.)
Ballast Ratio 35%

Sail Area:
Main 12.8 sq. m. (140 sq. ft.)
No. 1 18 sq. m. (195 sq. ft.)
No. 2 12 sq. m. (130 sq. ft.)
No. 3 8.3 sq. m. (90 sq. ft.)
Storm Jib 5 sq. m. (55 sq. ft.)

FEATURES INCLUDE:

- 1800 mm (6 ft.) Standing headroom.
- 6 Full sized berths.
- Dinette.
- Full galley facilities including ice box.
- Enclosed forward cabin.
- Large cockpit lockers.
- Deep dry, comfortable cockpit.
- Inboard Diesel Motor.
- Fully moulded & lined interior.
- Enclosable toilet.
- Simple to handle rig.
- Lightweight, simple operating centreplate.
- Fixed lead ballast, fitted low in hull in skeg.

